





Reception desk


1:20

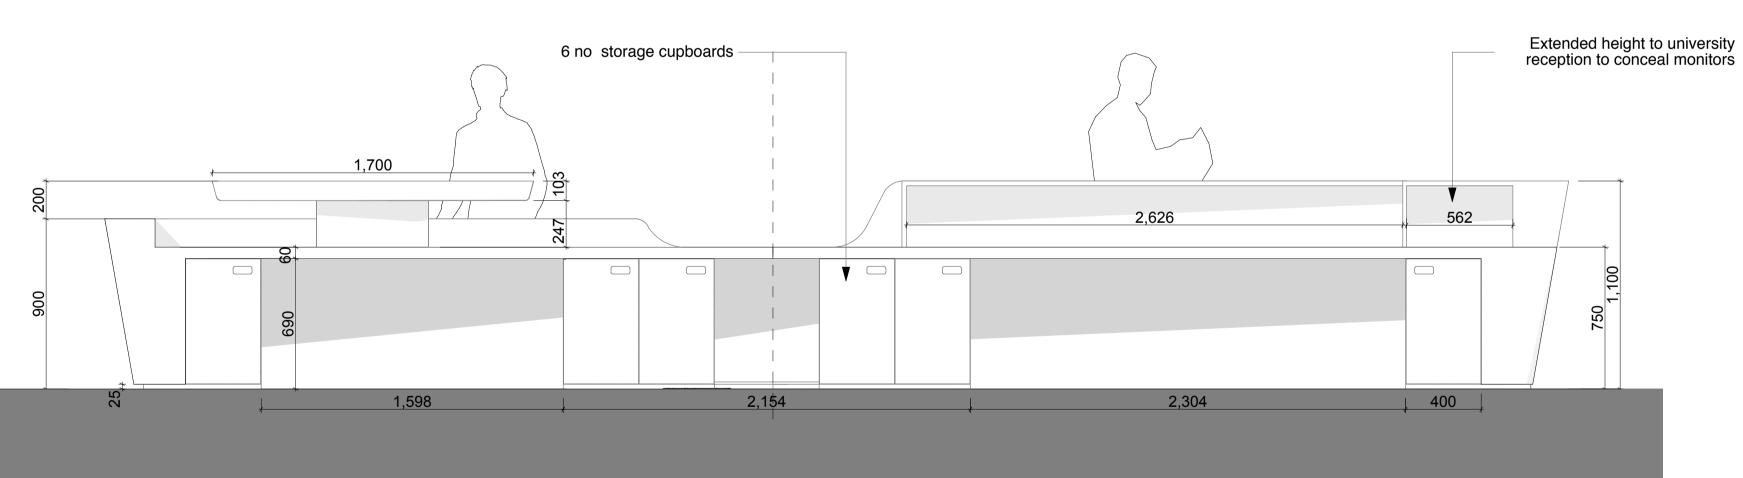

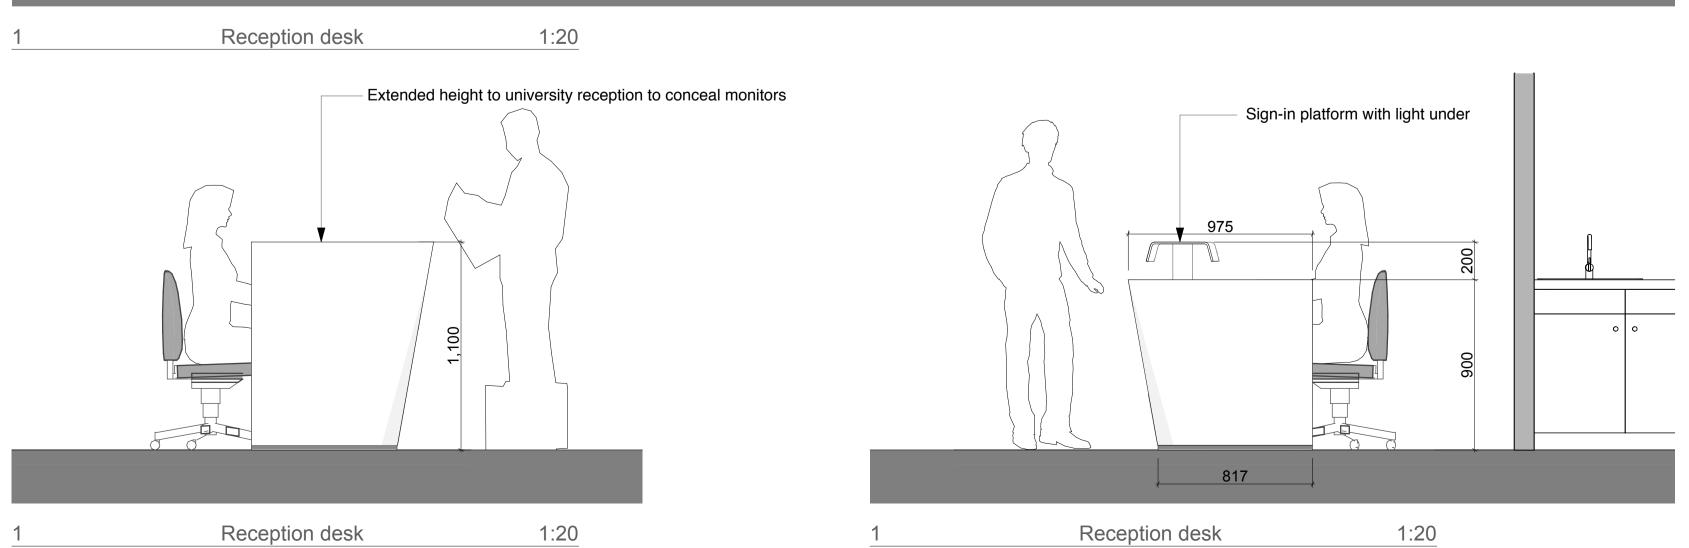

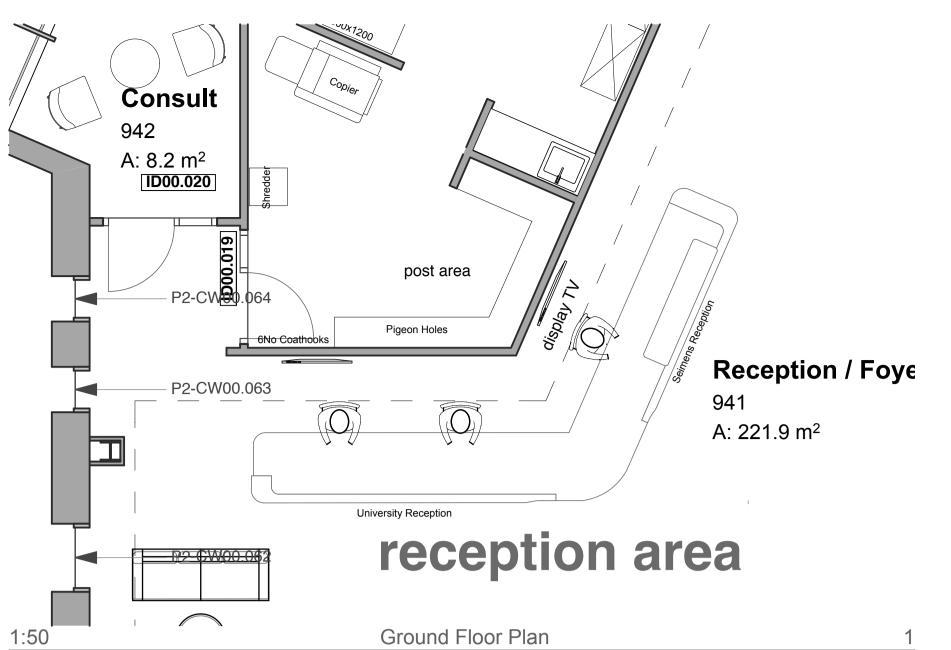


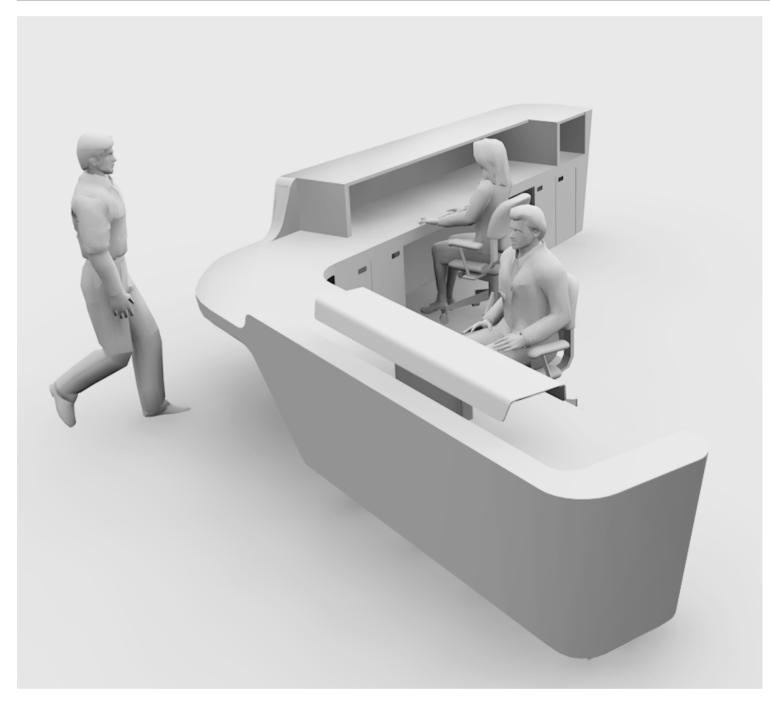

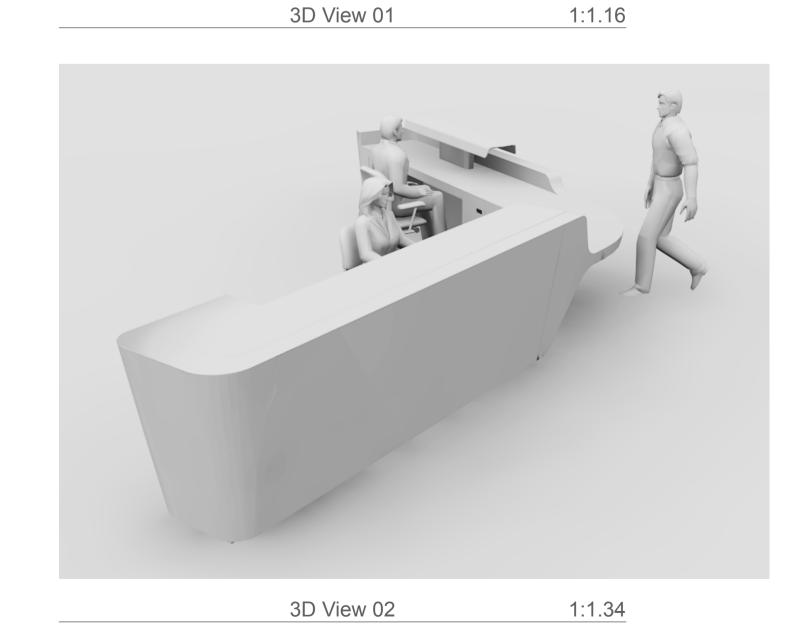

Reception desk:

Based on Isomi Mono desk range. Comprising of 800W x 800D standard modules varying in height 1100, 900 with custom corner unit including 6 no. under mounted cupboard units 400W x 230/464D, TransluCent branding to both university and siemens reception as shown, Sign in shelf to be located on siemens reception with light under. With custom shelf Material Krion® Porcelanosa solid surface colour TBC.

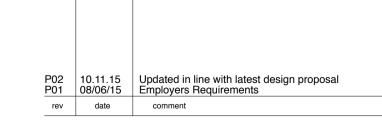

ECM, University of Lincoln

oh no drawing number:

drawing number:
proj origin zone level type role number

EC-MA-00-ZZ-DR-A-35160

drawing name / status / revision

Reception Desk-S2-P02

architecture / interiors / landscape
Email • info@maber.co.uk
Tel • 0115 9415555

info@maber.co.uk
Tel • 0115 9415555

maber.co.uk

issuing office

Nottingham

1:20, 1:50@**A1**

do not scale from this drawing• dimensions and levels to be checked on site by the contractor• all dimensions in millimetres unless otherwise noted • all levels in metres unless otherwise noted

The title, copyright and confidential information in this document belongs to Maber Associates Limited. Copyright . All rights reserved. You may not reproduce this document or disclose it to others without the consent of Maber Associates Limited

Phase 2